




BEARING DRIVESHAFT, INC.

10 mm x 30 mm x 9 mm NTN 6200LLB deep groove ball bearings

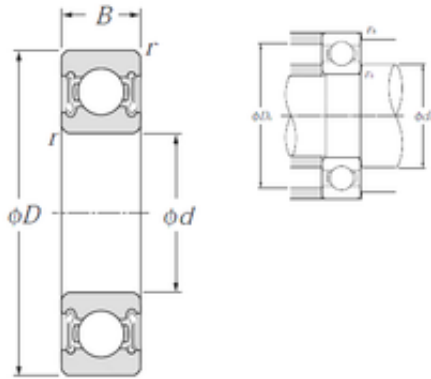

Bearing No. 6200LLB

6200LLB Bearing 2D drawings and 3D CAD models

Size	10x30x9 mm
Bore Diameter	10 mm
Outer Diameter	30 mm
Width	9 mm
d	10 mm
D	30 mm
B	9 mm
C	9 mm
r min.	0,6 mm
da min.	14 mm
da max	16 mm
Da max.	26 mm
ra max.	0,6 mm
Weight	0,032 Kg
Basic dynamic load rating (C)	5,1 kN
Basic static load rating (C0)	2,39 kN
(Grease) Lubrication Speed	25 000 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.031
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0



BEARING DRIVESHAFT, INC.

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	10MM Bore; 30MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; N
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.071
Bore	0.394 Inch 10 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	1.181 Inch 30 Millimeter
Outer Race Width	0.354 Inch 9 Millimeter
bore diameter:	10 mm
precision rating:	ISO Class 0
outside diameter:	30 mm
finish/coating:	Uncoated



BEARING DRIVESHAFT, INC.

overall width:	9 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	9 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	9 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	25000 rpm
internal clearance:	CN
fillet radius:	0.6 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	30000 RPM
dynamic load capacity:	5100 N
series:	62
static load capacity:	2390 N
manufacturer product page:	Click here