




BEARING DRIVESHAFT, INC.

75 mm x 115 mm x 20 mm SKF S7015 CD/HCP4A angular contact ball bearings

Bearing No. S7015 CD/HCP4A

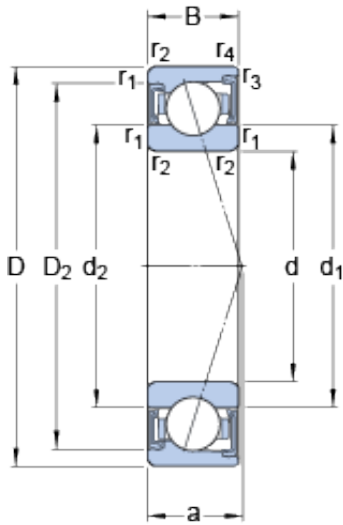

S7015 CD/HCP4A Bearing 2D drawings and 3D CAD models

Size	115x75x20 mm
Bore Diameter	115 mm
Outer Diameter	75 mm
Width	20 mm
d	75 mm
D	115 mm
B	20 mm
d ₁	87.3 mm
d ₂	87.3 mm
D ₂	105.62 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
a	22.8 mm
d _a - min.	81 mm
d _a - max.	86.7 mm
d _b - min.	81 mm
d _b - max.	86.7 mm
D _a - max.	109 mm
D _b - max.	111 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	52.7 kN
Basic static load rating - C ₀	49 kN
Fatigue load limit - P _u	2.1 kN



BEARING DRIVESHAFT, INC.

Limiting speed for grease lubrication	14000 r/min
Ball - D_w	12.7 mm
Ball - z	20
Calculation factor - f_0	15.7
Preload class A - G_A	200 N
Preload class B - G_B	400 N
Preload class C - G_C	800 N
Preload class D - G_D	1600 N
Calculation factor - f	1.14
Calculation factor - f	1
Calculation factor - f_{2A}	1
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Calculation factor - f_{2D}	1.09
Calculation factor - f_{HC}	1.02
Preload class A	93 N/micron
Preload class B	128 N/micron
Preload class C	179 N/micron
Preload class D	260 N/micron
d_1	87.3 mm
d_2	87.3 mm
D_2	105.62 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
d_a min.	81 mm
d_a max.	86.7 mm
d_b min.	81 mm
d_b max.	86.7 mm
D_a max.	109 mm
D_b max.	111 mm



BEARING DRIVESHAFT, INC.

r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	52.7 kN
Basic static load rating C_0	49 kN
Fatigue load limit P_u	2.08 kN
Attainable speed for grease lubrication	14000 r/min
Ball diameter D_w	12.7 mm
Number of balls z	20
Preload class A G_A	200 N
Static axial stiffness, preload class A	93 N/ μ m
Preload class B G_B	400 N
Static axial stiffness, preload class B	128 N/ μ m
Preload class C G_C	800 N
Static axial stiffness, preload class C	179 N/ μ m
Preload class D G_D	1600 N
Static axial stiffness, preload class D	260 N/ μ m
Calculation factor f	1.14
Calculation factor f_1	1
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.02
Calculation factor f_{2C}	1.05
Calculation factor f_{2D}	1.09
Calculation factor f_{HC}	1.02
Calculation factor f_0	15.7
Mass bearing	0.54 kg