




# BEARING DRIVESHAFT, INC.

## 65 mm x 115 mm x 10 mm SKF 52216 thrust ball bearings

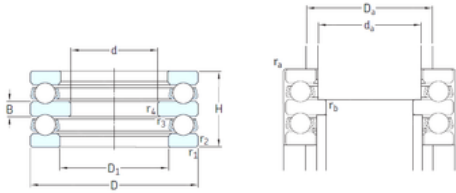

Bearing No. 52216

52216 Bearing 2D drawings and 3D CAD models

Size	65x115x48 mm
Bore Diameter	65 mm
Outer Diameter	115 mm
Width	48 mm
d	65 mm
D	115 mm
H	48 mm
r1 min.	1 mm
r2 min.	1 mm
r3 min.	1 mm
r4 min.	1 mm
B	10 mm
D1	82 mm
Da max.	94 mm
ra max.	1 mm
rb max.	1 mm
da	80 mm
Weight	1,7 Kg
Basic dynamic load rating (C)	76,1 kN
Basic static load rating (C0)	208 kN
Fatigue load limit (Pu)	7,65
Reference speed	2400 r/min
Limiting speed	3400 r/min
Category	Thrust Ball Bearing
Inventory	0.0



## BEARING DRIVESHAFT, INC.

Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	1.679
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	ABEC 1   ISO P0
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row
Long Description	65MM Bore 1; 82MM Bore 2; 115MM Outside Diameter; 48MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; ABEC 1   ISO P0 Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171507
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	52216
Weight / LBS	3.699
Overall Height with Aligning Washer	0 Inch   0 Millimeter
Outside Diameter	4.528 Inch   115 Millimeter
Bore 2	3.228 Inch   82 Millimeter
Height	1.89 Inch   48 Millimeter
Bore 1	2.559 Inch   65 Millimeter



## BEARING DRIVESHAFT, INC.

bore diameter:	65 mm
static load capacity:	208 kN
outside diameter:	115 mm
dynamic load capacity:	76.1 kN
overall width:	48 mm
maximum rpm:	3400 RPM
thrust bearing type:	Double-Direction
cage material:	Steel
outside diameter design:	Straight
fillet radius:	1 mm
separable or banded:	Separable
series:	522
precision rating:	ABEC 1 (ISO Class Normal)
$D_1$	82 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$	80 mm
$D_a$ max.	94 mm
$r_a$ max.	1 mm
$r_b$ max.	1 mm
Basic dynamic load rating C	76.1 kN
Basic static load rating $C_0$	208 kN
Fatigue load limit $P_u$	7.65 kN
Minimum load factor A	0.22
Mass bearing (including seat washer where applicable)	1.7 kg