




BEARING DRIVESHAFT, INC.

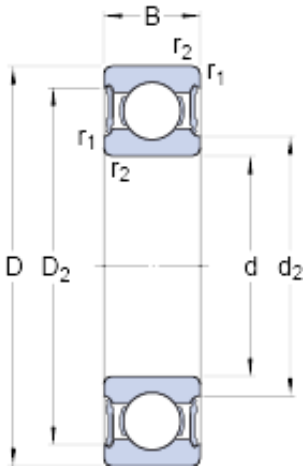

17 mm x 30 mm x 7 mm SKF 61903-2RS1 deep groove ball bearings

Bearing No. 61903-2RS1

61903-2RS1 Bearing 2D drawings and 3D CAD models

Size	30x17x7 mm
Bore Diameter	30 mm
Outer Diameter	17 mm
Width	7 mm
d	17 mm
D	30 mm
B	7 mm
d ₂	19.4 mm
D ₂	27.7 mm
r _{1,2} - min.	0.3 mm
d _a - min.	19 mm
d _a - max.	19.3 mm
D _a - max.	28 mm
r _a - max.	0.3 mm
Basic dynamic load rating - C	4.6 kN
Basic static load rating - C ₀	2.6 kN
Fatigue load limit - P _u	0.108 kN
Limiting speed	14000 r/min
Calculation factor - k _r	0.02
Calculation factor - f ₀	14.7
Category	Single Row Ball Bearings
Inventory	6.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



BEARING DRIVESHAFT, INC.

Weight / Kilogram	0.019
EAN	7316577121936
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	17MM Bore; 30MM Outside Diameter; 7MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	61903 2RS1
Weight / LBS	0.04
Outer Race Width	0.276 Inch 7 Millimeter
Bore	0.669 Inch 17 Millimeter
Outside Diameter	1.181 Inch 30 Millimeter
bore diameter:	17 mm
static load capacity:	2.55 kN



BEARING DRIVESHAFT, INC.

outside diameter:	30 mm
precision rating:	Not Rated
overall width:	7 mm
finish/coating:	Uncoated
bore type:	Round
cage material:	Steel
closure type:	Double Sealed
outer ring width:	7 mm
row type & fill slot:	Single Row Non-Fill Slot
fillet radius:	0.3 mm
internal clearance:	C0
maximum rpm:	14000 RPM
operating temperature range:	-40 to +210 ° F
series:	61
dynamic load capacity:	4.62 kN
d_2	19.4 mm
D_2	27.7 mm
$r_{1,2}$ min.	0.3 mm
d_a min.	19 mm
d_a max.	19.3 mm
D_a max.	28 mm
r_a max.	0.3 mm
Basic dynamic load rating C	4.62 kN
Basic static load rating C_0	2.55 kN
Fatigue load limit P_u	0.108 kN
Calculation factor k_r	0.02
Calculation factor f_0	14.7
Mass bearing	0.017 kg